

# INSTALLATION INSTRUCTIONS

## SSH47X, SSH1416X, SSH710X, SSH1014X SnapTak™ Adjustable Cable Hanger

©2019

1779 IB B

**NOTE:** This hanger is intended for tovertop and rooftop cable installations. It is not to be used for vertical cable runs in excess of 10 ft.

**1a**

pins  
channel  
latches

**SSH47X**  
The SnapTak hanger has a circular support channel and multiple support members to engage the cable. Go to Step 2a1

**1b**

main support members (2)  
channel  
guide pins (6)  
latches

**SSH710X & SSH1014X**  
The SnapTak hanger has two main support members to engage the cable and six guide pins to help center the cable. Go to Step 2b


**1b**

main support members (2)  
latches



**SSH1416X**  
The SnapTak hanger has two main support members to engage the cable and six guide pins to help center the cable. Go to Step 2b



**SSH47X**  
2a1. Place hanger under cable.  
2a2. Push cable into the support channel while expanding hanger latches with finger or thumb.

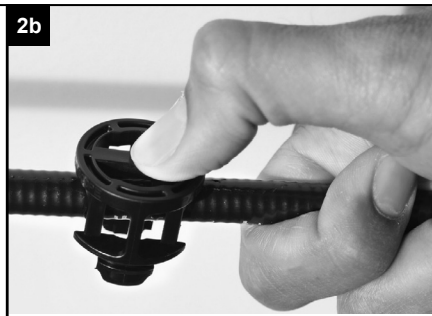

**SSH1416X**  
Press hanger onto cable until cable centers in channel.  
**SSH710X & SSH1014X**  
Press hanger onto cable until cable centers in channel. Guide pins are designed to snap off on larger cables.

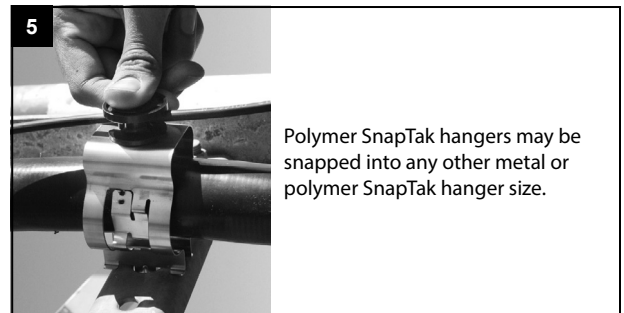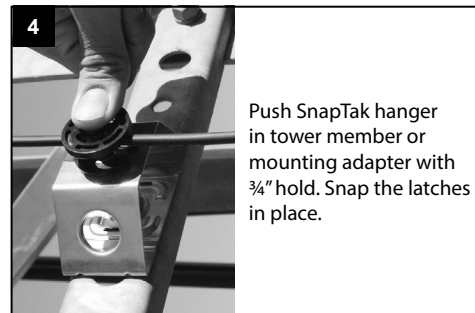

**WARNING**  
This product is to be used for horizontal cable management and cable organization between devices such as RRUs and antennas on the top of towers and rooftops only. It is not to be used for vertical cable runs up the tower unless specified.

Part Information for Available Hangers		
Part Number	Stackability	Cable Diameter Range (mm)
SSH47X	3	4.00 min to 7.00 max
SSH710X	3	7.10 min to 10.00 max
SSH1014X	3	10.10 min to 14.00 max
SSH1416X	3	14.10 min to 16.00 max



Acceptable stack combinations