

INSTALLATION INSTRUCTIONS

©2020

Hanger Clamp for Coaxial Cable Applications

1820 IB A


PRODUCT DESCRIPTION

Hanger Clamps are designed specifically for wireless applications. Multiple runs of Coaxial Cable can be stacked in space saving configurations of one, two, or three. It is recommended that the Hanger Clamps be placed at one-meter intervals. The hanger Clamps are manufactured from a durable weather resistant Polycarbonate which exceeds the recommended temperature for Coaxial Cable. A complete line of support accessories are available to provide versatility when securing cable in unique applications such as roof tops, water towers, and wood poles.

NOTICE


Installation of this product should only be performed by trained, qualified and experienced personnel. Installation instructions for this product should be read thoroughly before installation is performed. The manufacturer and supplier of this product disclaims any liability or responsibility for the results of improper or unsafe installation practice.

- Steel Adaptor Bracket
- Threaded Rod, Nuts(2) , Flat Washer (2), Lock Washer (2)

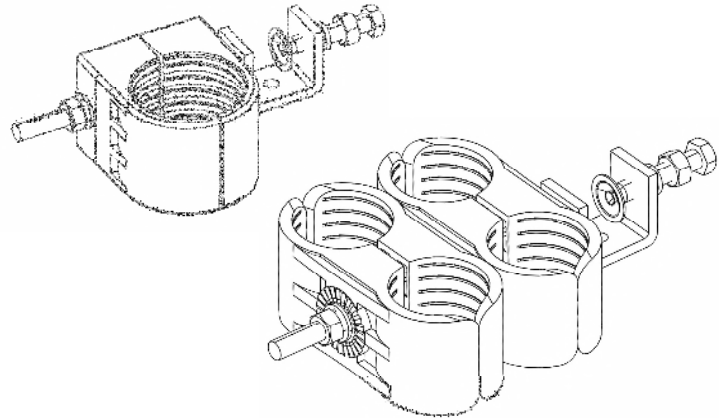

- 10mm or Adjustable Wrench
- Torque Wrench

TYPICAL APPLICATIONS

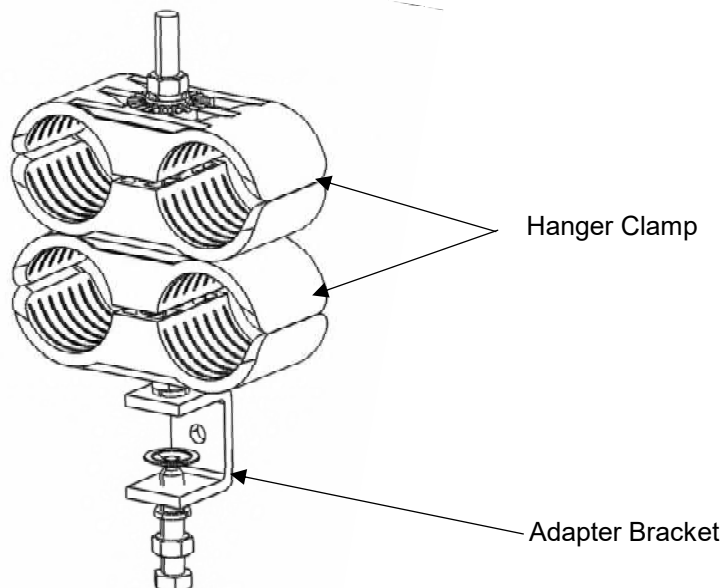

Note:
Hanger Clamps may vary
depending on cable configurations.

NOTE:

1. Critical to maintain a tightening torque between 6-8Nm (4.4256-5.9008 ft/lbs). Failure to do so will adversely affect hanger performance.
2. Double stack shown, installation procedure is the same for Single and Triple stack locking coax blocks.