INSTALLATION INSTRUCTIONS





3-Way Snap-in Hanger Adapter

1860 IB A



TYPICAL APPLICATIONS

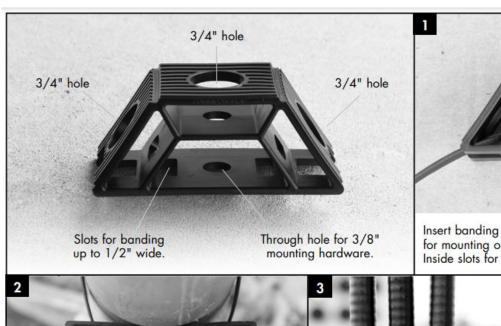



Insert banding though desired slots. Use outside slots for mounting on large diameter pipes and poles. Inside slots for small diameters.



Tighten banding to secure 3-way adapter tightly to round member. Cut off excess strap tail.



Configuration showing adapter securely attached to tower member.

Maximum hanger loading is nine 1/2" hangers.



3-way adapter can also be mounted to tower angle and standoff adapters with 3/8" hardware.

