

PRODUCT REFERENCE SHEET

©2020



Standard Cushion Inserts for Coaxial Cable Applications

1214 PR M (Page 1 of 3)


PRODUCT DESCRIPTION

Standard Cushion Inserts provide a weather tight seal around coaxial cable or elliptical waveguide when penetrating building walls or equipment bulkheads. SC-series cushions can be ordered individually, in boot assemblies, or with cushion hanger assembly kits to meet any application requirements. Standard cushion inserts are constructed from UV-resistant EPDM rubber which is durable in extreme temperatures and harsh environmental conditions.

TYPICAL APPLICATIONS

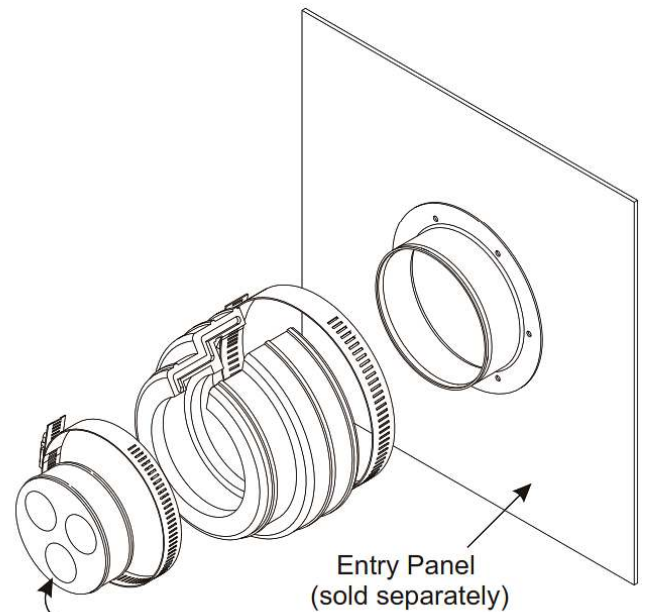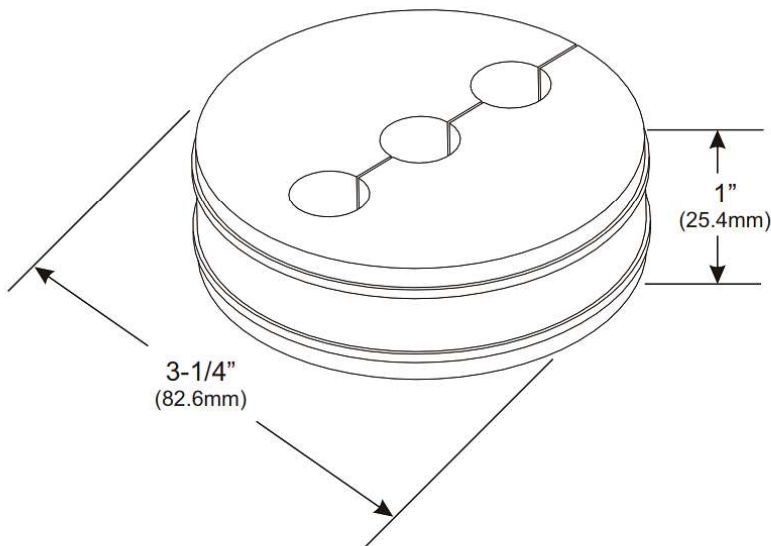

SC-78-3
STANDARD CUSHION
for 7/8" coaxial cable with 3 holes
in a boot assembly application.

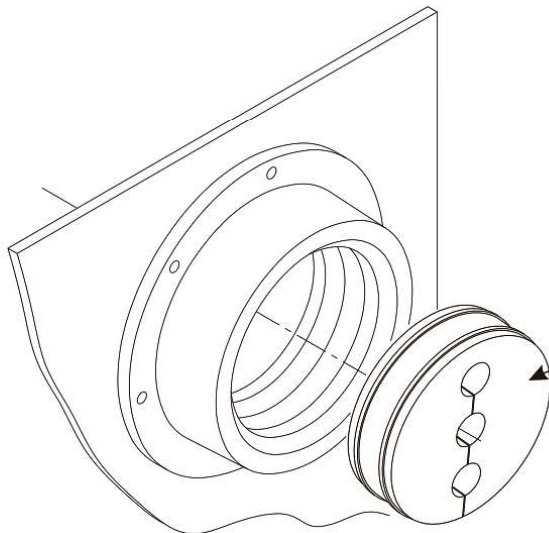

SC-12-3
STANDARD CUSHION
for 1/2" coaxial cable with 3 holes in
a standard entry port application.

SPECIFICATIONS

| STANDARD COAX CUSHIONS | | | | |
|---|-------------------------|-------------------|-----------------------------|-----------------|
| STANDARD PORT CUSHION FOR COAXIAL CABLE | | | | |
| <u>Part Number</u> | <u>Size</u> | <u># of Holes</u> | <u>Weight lbs. (kg)</u> | <u>Kit Qty.</u> |
| SC-B | | 0 | 0.4 (0.2) | Each |
| SC-12-1 | 1/2" | 1 | 0.4 (0.2) | Each |
| SC-12-2 | 1/2" | 2 | 0.4 (0.2) | Each |
| SC-12-3 | 1/2" | 3 | 0.4 (0.2) | Each |
| SC-12-4 | 1/2" | 4 | 0.4 (0.2) | Each |
| SC-12-5 | 1/2" | 5 | 0.4 (0.2) | Each |
| SC-38-1 | 3/8" | 1 | 0.4 (0.2) | Each |
| SC-38-2 | 3/8" | 2 | 0.4 (0.2) | Each |
| SC-38-3 | 3/8" | 3 | 0.4 (0.2) | Each |
| SC-38-9 | 3/8" | 9 | 0.4 (0.2) | Each |
| SC-58-1 | 5/8" | 1 | 0.4 (0.2) | Each |
| SC-58-2 | 5/8" | 2 | 0.4 (0.2) | Each |
| SC-58-3 | 5/8" | 3 | 0.4 (0.2) | Each |
| SC-58-4 | 5/8" | 4 | 0.4 (0.2) | Each |
| SC-78-1 | 7/8" | 1 | 0.4 (0.2) | Each |
| SC-78-2 | 7/8" | 2 | 0.4 (0.2) | Each |
| SC-78-3 | 7/8" | 3 | 0.4 (0.2) | Each |
| SC-78-4 | 7/8" | 4 | 0.4 (0.2) | Each |
| SC-114-1 | 1-1/4" | 1 | 0.3 (0.1) | Each |
| SC-158-1 | 1-5/8" | 1 | 0.3 (0.1) | Each |
| SC-214-1 | 2-1/4" | 1 | 0.2 (0.09) | Each |
| STANDARD PORT CUSHION FOR CELL REACH® COAX | | | | |
| <u>Part Number</u> | <u>Size</u> | <u># of Holes</u> | <u>Weight lbs. (kg)</u> | <u>Kit Qty.</u> |
| SC-12CR-1 | 1/2" | 1 | 0.4 (0.2) | Each |
| SC-12CR-2 | 1/2" | 2 | 0.4 (0.2) | Each |
| SC-12CR-3 | 1/2" | 3 | 0.4 (0.2) | Each |
| SC-212CR-4 | 1/2" | 4 | 0.4 (0.2) | Each |
| SC-38CR-1 | 3/8" | 1 | 0.4 (0.2) | Each |
| SC-38CR-3 | 3/8" | 3 | 0.4 (0.2) | Each |
| SC-38CR-9 | 3/8" | 9 | 0.4 (0.2) | Each |
| SC-78CR-1 | 7/8" | 1 | 0.4 (0.2) | Each |
| SC-78CR-2 | 7/8" | 2 | 0.3 (0.1) | Each |
| SC-78CR-3 | 7/8" | 3 | 0.3 (0.1) | Each |
| SC-78CR-4 | 7/8" | 4 | 0.3 (0.1) | Each |
| SC-158CR-1 | 1-5/8" | 1 | 0.3 (0.1) | Each |
| STANDARD PORT CUSHION FOR RG213, RG-214,&RG11 | | | | |
| <u>Part Number</u> | <u>Size</u> | <u># of Holes</u> | <u>Weight lbs. (kg)</u> | <u>Kit Qty.</u> |
| SC-RG213-6 | RG213, RG214, & RG11 | 6 | 0.3 (0.1) | Each |

SPECIFICATIONS

| STANDARD COAX CUSHIONS | | | | |
|--|--------------|-------------------|-----------------------------|-----------------|
| STANDARD PORT CUSHION FOR RG8 COAXIAL CABLE | | | | |
| <u>Part Number</u> | <u>Size</u> | <u># of Holes</u> | <u>Weight lbs. (kg)</u> | <u>Kit Qty.</u> |
| SC-RG8-6 | RG8 | 6 | 0.3 (0.1) | Each |
| STANDARD PORT CUSHION FOR FLEX COAX | | | | |
| <u>Part Number</u> | <u>Size</u> | <u># of Holes</u> | <u>Weight</u> | <u>Kit Qty.</u> |
| SC-12F-1 | 1/2" | 1 | 0.4 (0.2) | Each |
| SC-12F-2 | 1/2" | 2 | 0.4 (0.2) | Each |
| SC-12F-3 | 1/2" | 3 | 0.4 (0.2) | Each |
| SC-12F-4 | 1/2" | 4 | 0.4 (0.2) | Each |
| STANDARD PORT CUSHION FOR LMR COAX | | | | |
| <u>Part Number</u> | <u>Size</u> | <u># of Holes</u> | <u>Weight lbs. (kg)</u> | <u>Kit Qty.</u> |
| SC-400T-6 | LMR-400 | 6 | 0.3 (0.1) | Each |
| SC-600T-1 | LMR-600 | 1 | 0.4 (0.2) | Each |
| SC-600T-2 | LMR-600 | 2 | 0.4 (0.2) | Each |
| SC-600T-3 | LMR-600 | 3 | 0.4 (0.2) | Each |
| SC-600T-4 | LMR-600 | 4 | 0.4 (0.2) | Each |
| SC-900T-1 | LMR-900 | 1 | 0.4 (0.2) | Each |
| SC-900T-2 | LMR-900 | 2 | 0.4 (0.2) | Each |
| SC-900T-3 | LMR-900 | 3 | 0.4 (0.2) | Each |
| SC-900T-4 | LMR-900 | 4 | 0.4 (0.2) | Each |
| SC-1200T-1 | LMR-1200 | 1 | 0.3 (0.1) | Each |
| SC-1200T-2 | LMR-1200 | 2 | 0.3 (0.1) | Each |
| SC-1200T-3 | LMR-1200 | 3 | 0.3 (0.1) | Each |
| SC-1700T-1 | LMR-1700 | 1 | 0.3 (0.1) | Each |
| STANDARD PORT CUSHION FOR ELLIPTICAL WAVEGUIDE | | | | |
| <u>Part Number</u> | <u>Size</u> | <u># of Holes</u> | <u>Weight lbs. (kg)</u> | <u>Kit Qty.</u> |
| SC-37-1 | EW37 | 1 | 0.3 (0.1) | Each |
| SC-46-1 | E46 | 1 | 0.3 (0.1) | Each |
| SC-52-1 | EW52 & E60 | 1 | 0.3 (0.1) | Each |
| SC-63-1 | EW63 & E65 | 1 | 0.3 (0.1) | Each |
| SC-70-1 | E70 | 1 | 0.3 (0.1) | Each |
| SC-77-1 | EW77 & E78 | 1 | 0.4 (0.2) | Each |
| SC-85-1 | EW85 & E108 | 1 | 0.4 (0.2) | Each |
| SC-90-1 | EW90 | 1 | 0.4 (0.2) | Each |
| SC-127-1 | EW127 & E130 | 1 | 0.4 (0.2) | Each |
| SC-150-1 | E150 & EW132 | 1 | 0.4 (0.2) | Each |
| SC-180-1 | EW180 | 1 | 0.4 (0.2) | Each |
| SC-220-1 | EW220 | 1 | 0.4 (0.2) | Each |