PRODUCT REFERENCE SHEET

©2020

Feed-thru Entry Panels
EP-575

1241 PR D

PRODUCT DESCRIPTION

Aluminum Feed-thru Entry Panels enable multiple coax runs to enter buildings and shelters. The entry panel supports coax at the entry point and prevents moisture from entering the building. Feed-thru entry panels feature 4" (101.6mm) or 5" (127mm) openings to accept 4" (101.6mm) or 5" (127mm) boot assemblies. They can be used in both interior and exterior wall mounting applications. Each feed-thru entry panel includes #14 stainless steel screws, finishing washers, plastic anchors, and entry port caps. Feed-thru entry panels are manufactured from .080" (2.0mm) aluminum and are powder coated to ensure long term integrity and provide appealing aesthetics.

TYPICAL APPLICATIONS

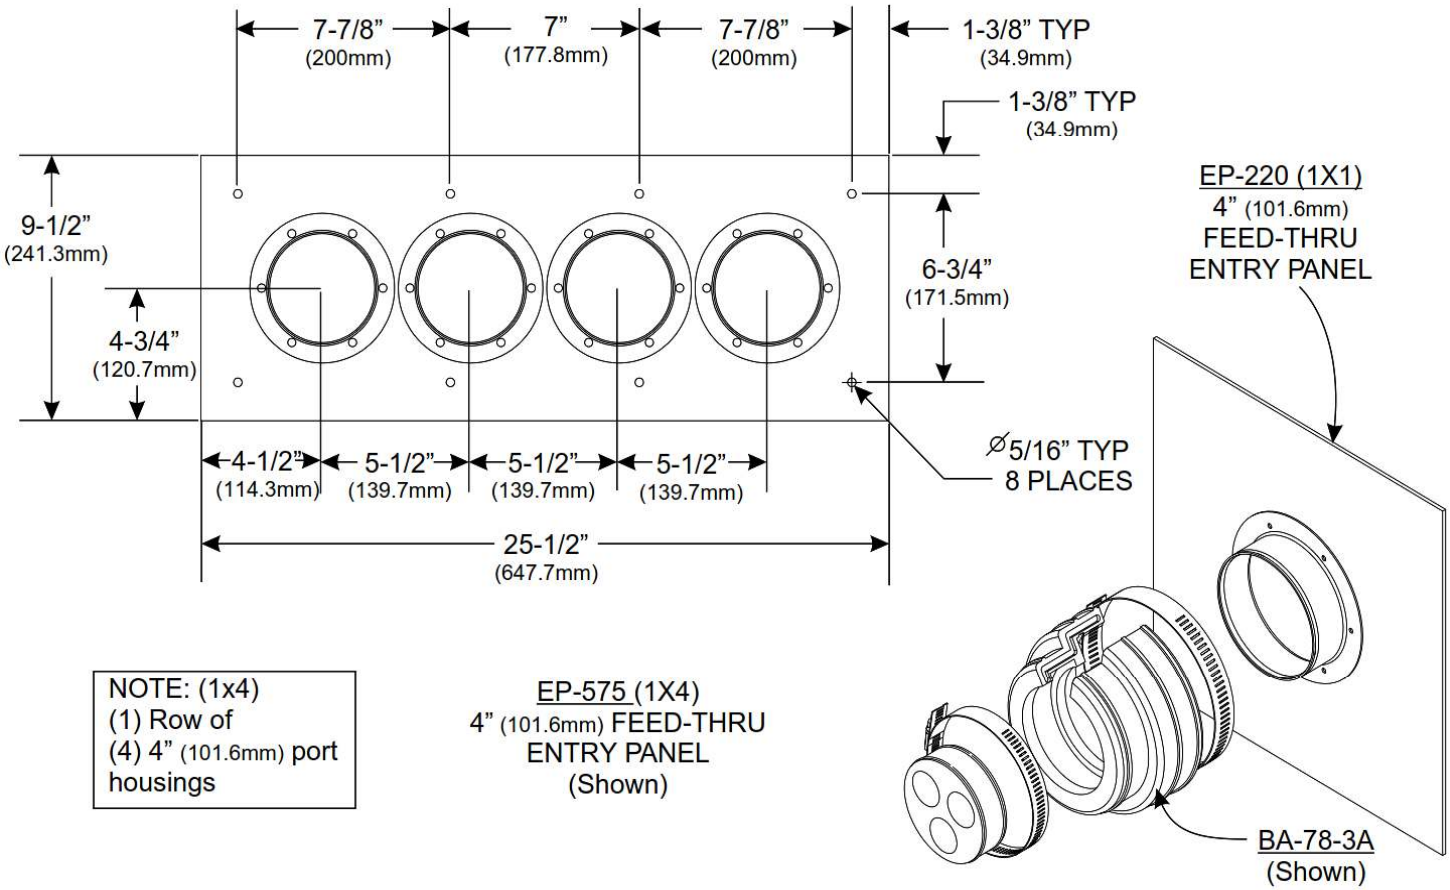

NOTE: (1x4)
(1) Row of
(4) 4" (101.6mm) port housings

EP-575 (1X4)
4" (101.6mm) FEED-THRU
ENTRY PANEL
(Shown)

SPECIFICATIONS

Finish:

Entry panels are manufactured from .080" aluminum and are powder coated.

All attachment hardware is stainless steel.

4" FEED-THRU ENTRY PANEL					
Part #	Description	Wall Opening Size		Weight lbs. (kg)	Qty.
		Width	Height		
EP-575	4" (101.6mm) Entry Panel, 4 Port, 1x4	20-1/2" (520.7mm)	4" (101.6mm)	3.5 (1.6)	Each