

PRODUCT REFERENCE SHEET

©2020


GB-0412 Series Ground Buss Bar Kits for Coaxial Cable Grounding Applications

1534 PR E


PRODUCT DESCRIPTION

GB-0412 Series Ground Buss Bar Kits provide a single, versatile solution to create a central ground point at your site. GB-0412 series ground buss bars are manufactured from 1/4" (6.4mm) thick solid copper and incorporate twenty-six pairs of 7/16" holes. By slotting one hole in each pair of 7/16" holes, the ground buss bar accommodates any lug-hole spacing from 3/4" to 1". Ground buss bar kits are available with or without attachment hardware and are also available with an optional tin plated finish.

TYPICAL APPLICATIONS

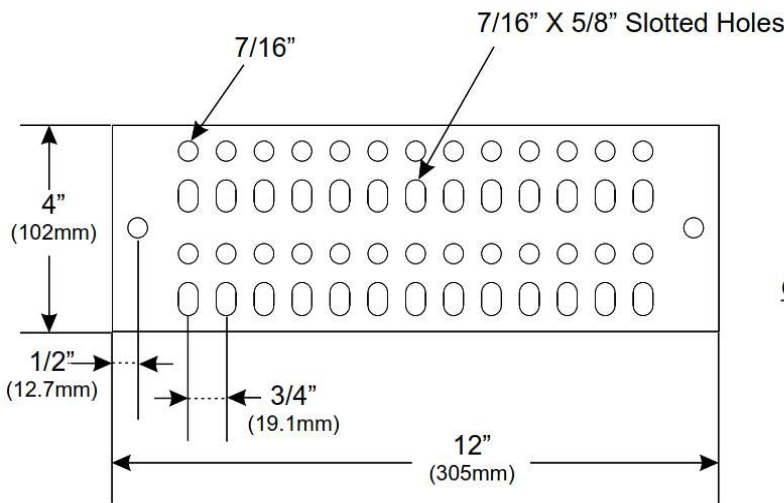

GB-0412-NH / GB-0412T-NH

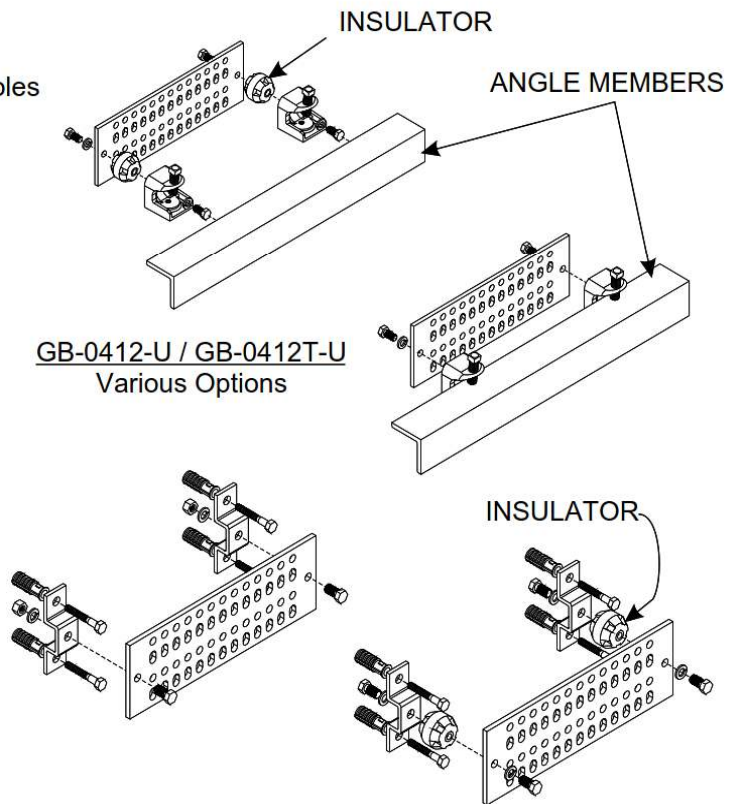

SPECIFICATIONS

Material:

- Buss bar solid copper
- Mounting hardware stainless steel
- Mounting brackets galvanized steel

GB-0412 GROUND BUSS BAR KITS			
Part #	Description	Weight lbs. (kg)	Kit Qty.
GB-0412-NH	Ground Buss Bar, 1/4" X 4" X 12" (6.3mm X 102mm X 305mm), Hardware Not Included	3.3 (1.5)	Each
GB-0412T-NH	Tinned Ground Buss Bar, 1/4" X 4" X 12" (6.3mm X 102mm X 305mm), Hardware Not Included	3.3 (1.5)	Each
GB-0412-U	Universal Ground Buss Bar Kit, 1/4" X 4" X 12" (6.3mm X 102mm X 305mm), w/ Universal Buss Bar Hardware Kit	7.2 (3.3)	Each
GB-0412T-U	Universal Tinned Ground Buss Bar Kit, 1/4" X 4" X 12" (6.3mm X 102mm X 305mm), w/ Universal Buss Bar Hardware Kit	7.2 (3.3)	Each